




D50 1in Full Circle Rotor - Electric Vih

Acme

RGWD50E2570A

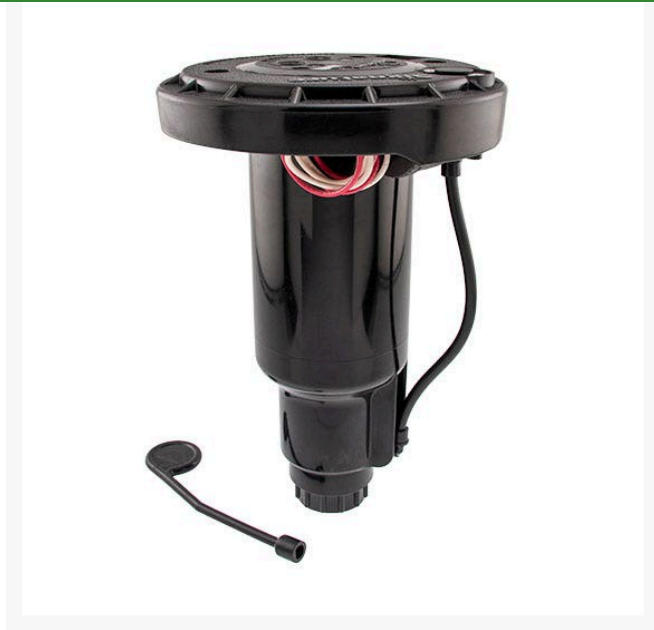

Details

A full 4-inch pop-up clears tall turfgrass for even coverage. Stainless-steel riser resists damage and vandalism. Special design eliminates blow-by and reduces pressure loss to improve system performance. Dual-direction flushing protects internals from debris and ensures positive pop-up/down. Radius can be adjusted up to 25 percent for best coverage. Quick lock design allows internals to be serviced from the rotor's top. Range: 53'-74'.

- A full 4-inch pop-up clears tall turfgrass for even coverage.
- Rolled-over flange keeps turfgrass clear of riser and nozzle.
- Stainless-steel riser resists damage and vandalism.
- Tough, commercial-grade plastic case stands up to punishment.
- Special design eliminates blow-by and reduces pressure loss to improve system performance.
- Dual-direction flushing protects internals from debris and ensures positive pop-up/down.
- Uniform coverage with square or triangular spacing.
- Full-circle and adjustable patterns for maximum flexibility.
- Easy arc adjustment in the field without any tools.
- Nozzle kit offers fully interchangeable nozzles and is included with each rotor.
- Unique manual On/Off control for hydraulic rotors.
- Heavy-duty spring assures positive retraction.
- Radius can be adjusted up to 25 percent for best coverage.
- Compact cartridge design allows for quick and easy repair.
- Quick lock design allows internals to be

Baber Turf Equipment Co.

Unit 6 / 10 Firth Street Auckland, 2113
09 294 6040

<https://baber.rrproducts.com/>



D50 1in Full Circle Rotor - Electric Vih Acme RGWD50E2570A



serviced from the rotor's top.

Specifications

| | |
|---------------------------|-----------------|
| Manufacturer | Weathermatic |
| Manufacturer's Model No | D50E2570A |
| Body Height | 9.75 in |
| Exposed Cap Diameter | 6.5 in |
| Inlet Size | 1 in |
| Maximum Pressure | 100 psi |
| Minimum Pressure | 40 psi |
| Pop-up Height | 4 in |
| Spinkler Flow | 11.0 - 31.3 gpm |
| Sprinkler Operating Range | 50 - 80 psi |
| Thread Type | ACME |

Baber Turf Equipment Co.

Unit 6 / 10 Firth Street Auckland, 2113
09 294 6040

<https://baber.rrproducts.com/>